



IFW

Docket No.: V7500.0003/P003
(PATENT)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of:
Ronald A. Marino et al.

Application No.: 10/562,058

Confirmation No.: 4142

Filed: December 22, 2005

Art Unit: N/A

For: APPARATUS FOR AND METHOD OF
USING A DIVERSITY ANTENNA

Examiner: Not Yet Assigned

INFORMATION DISCLOSURE STATEMENT (IDS)

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Dear Sir:

Pursuant to 37 CFR 1.56, 1.97 and 1.98, the attention of the Patent and Trademark Office is hereby directed to the references listed on the attached PTO/SB/08. It is respectfully requested that the information be expressly considered during the prosecution of this application, and that the references be made of record therein and appear among the "References Cited" on any patent to issue therefrom.

This Information Disclosure Statement is filed before the mailing date of a first Office Action on the merits as far as is known to the undersigned (37 CFR 1.97(b)(3)).

Copies of non-patent literature are enclosed. A copy of the "Feig Electronic" document is not enclosed, as the undersigned representative has not been able to obtain a copy of the document.

In accordance with 37 CFR 1.97(g), the filing of this Information Disclosure Statement shall not be construed to mean that a search has been made or that no other material information as defined in 37 CFR 1.56(a) exists. In accordance with 37 CFR 1.97(h), the filing of this Information Disclosure Statement shall not be construed to be an admission that any patent, publication or other information referred to therein is "prior art" for this invention unless specifically designated as such.

It is submitted that the Information Disclosure Statement is in compliance with 37 CFR 1.98 and the Examiner is respectfully requested to consider the listed references.

The Director is hereby authorized to charge any deficiency in the fees filed, asserted to be filed or which should have been filed herewith (or with any paper hereafter filed in this application by this firm) to our Deposit Account No. 04-1073, under Order No. V7500.0003/P003.

Dated: April 30, 2007

Respectfully submitted,

By 
Jeremy A. Cubert

Registration No.: 40,399

Rachael Lea Leventhal

Registration No.: 54,266


DICKSTEIN SHAPIRO LLP

1825 Eye Street, NW

Washington, DC 20006-5403

(202) 420-2200

Attorneys for Applicants



PTO/SB/08A/B (09-06)

Approved for use through 03/31/2007. OMB 0651-0031
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Substitute for form 1449/PTO INFORMATION DISCLOSURE STATEMENT BY APPLICANT (Use as many sheets as necessary)				Complete if Known	
				Application Number	10/562,058-Conf. #4142
				Filing Date	December 22, 2005
				First Named Inventor	Ronald A. Marino
				Art Unit	N/A
				Examiner Name	Not Yet Assigned
Sheet	1	of	1	Attorney Docket Number	V7500.0003/P003

U.S. PATENT DOCUMENTS					
Examiner Initials*	Cite No. ¹	Document Number	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear
		Number-Kind Code ² (if known)			

FOREIGN PATENT DOCUMENTS						
Examiner Initials*	Cite No. ¹	Foreign Patent Document	Publication Date MM-DD-YYYY	Name of Patentee or Applicant of Cited Document	Pages, Columns, Lines, Where Relevant Passages or Relevant Figures Appear	T ⁶
		Country Code ³ -Number ⁴ -Kind Code ⁵ (if known)				

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant. ¹ Applicant's unique citation designation number (optional). ² See Kinds Codes of USPTO Patent Documents at www.uspto.gov or MPEP 901.04. ³ Enter Office that issued the document, by the two-letter code (WIPO Standard ST.3). ⁴ For Japanese patent documents, the indication of the year of the reign of the Emperor must precede the serial number of the patent document. ⁵ Kind of document by the appropriate symbols as indicated on the document under WIPO Standard ST.16 if possible. ⁶ Applicant is to place a check mark here if English language Translation is attached.

NON PATENT LITERATURE DOCUMENTS			
Examiner Initials	Cite No. ¹	Include name of the author (in CAPITAL LETTERS), title of the article (when appropriate), title of the item (book, magazine, journal, serial, symposium, catalog, etc.), date, page(s), volume-issue number(s), publisher, city and/or country where published.	T ²
	CA	WILMAR K. ROBERTS, "A New Wide-Band Balun", Proc. IRE, vol. 45 pp. 1628-1631; December 1957.	
	CB	R. BAWER and J.J. WOLFE, "A Printed Circuit Balun for Use with Spiral antennas", IRE Transactions on Microwave Theory and Techniques, vol. MIT-8, pp. 319-325; May 1960.	
	CC	Feig Electronic, GmbH, "Reader and Antenna Training", pp. 41-42, July 2003.	

*EXAMINER: Initial if reference considered, whether or not citation is in conformance with MPEP 609. Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

¹ Applicant's unique citation designation number (optional). ² Applicant is to place a check mark here if English language Translation is attached.

Examiner Signature		Date Considered	
-----------------------	--	--------------------	--

1960

Bawer and Wolfe: A Printed Circuit Balun for Use with Spiral Antennas

319

Projection of $\mathcal{L}\tilde{v}_0$ on the z axis indicates that

$$\frac{\partial}{\partial z} \left[\nabla_M^2 A - \frac{m^2}{r^2} A \right] = 0.$$

In consequence, $\nabla_M^2 A - (m^2/r^2)A$ has a constant value along a parallel to the z axis. This value must be zero, because

$$\nabla_M^2 A - \frac{m^2}{r^2} A = 0 \quad (52)$$

on c . It follows that (52) is valid over the whole area D . An application of Green's theorem shows that

$$\iint_D \left\{ \frac{m^2}{r^2} A^2 + |\text{grad } A|^2 \right\} r dr dz = 0$$

so that both A and \tilde{v}_0 must vanish.

The self-adjoint character of \mathcal{L} (i.e., $\langle \tilde{c}, \mathcal{L}\tilde{d} \rangle = \langle \tilde{d}, \mathcal{L}\tilde{c} \rangle$) can be quickly established by using a relation derived from the three-dimensional Green's theorem (32):

If we use this relation twice, setting $g = r/m \text{ div}_M \tilde{P}$, $h = r/m \text{ div}_M \tilde{Q}$ and subtracting, we obtain, since

$$\begin{aligned} \text{div}_M \left[\nabla_M^2 \tilde{c} - \frac{m^2 \tilde{c}}{r^2} + \frac{2}{r} \tilde{u}_r \text{div}_M \tilde{c} \right] \\ = \frac{m}{r} \nabla_M^2 \left(\frac{r \text{div}_M \tilde{c}}{m} \right) + \frac{2m^2}{r^3} c_r - \frac{m^2 + 1}{r^2} \text{div}_M \tilde{c} \\ = \nabla_M^2 (\text{div}_M \tilde{c}) - \frac{m^2}{r^2} \text{div}_M \tilde{c} + \frac{2m^2}{r^3} c_r + \frac{2}{r} \frac{\partial}{\partial r} (\text{div}_M \tilde{c}), \end{aligned} \quad (54)$$

the relation,

$$\iint_D \left[\tilde{Q} \cdot \mathcal{L}\tilde{P} - \tilde{P} \cdot \mathcal{L}\tilde{Q} + \frac{r^2}{m^2} \text{div}_M \tilde{Q} \text{div}_M \mathcal{L}\tilde{P} - \frac{r^2}{m^2} \text{div}_M \tilde{P} \text{div}_M \mathcal{L}\tilde{Q} \right] r dr dz = 0. \quad (55)$$

The second member in (53) vanishes because of the boundary conditions. Eq. (55) is nothing but $\langle \tilde{c}, \mathcal{L}\tilde{d} \rangle - \langle \tilde{d}, \mathcal{L}\tilde{c} \rangle = 0$, the relation we set out to prove.

$$\begin{aligned} \iint_D \left\{ \tilde{Q} \cdot \left(\nabla_M^2 \tilde{P} - \frac{m^2}{r^2} \tilde{P} + \frac{2mg}{r^2} \tilde{u}_r \right) + h \left(\nabla_M^2 g - \frac{m^2 + 1}{r^2} g + \frac{2mc_r}{r^2} \right) \right. \\ \left. + \left(\text{div}_M \tilde{P} - \frac{mg}{r} \right) \cdot \left(\text{div}_M \tilde{Q} - \frac{mh}{r} \right) + \text{curl}_M \tilde{P} \cdot \text{curl}_M \tilde{Q} \right. \\ \left. + \left[\text{curl}_M (g\tilde{u}_\phi) + \frac{m}{r} (\tilde{u}_\phi \times \tilde{P}) \right] \cdot \left[\text{curl}_M (h\tilde{u}_\phi) + \frac{m}{r} (\tilde{u}_\phi \times \tilde{Q}) \right] \right\} r dr dz \\ = \int_c \left\{ (\tilde{u}_n \times \tilde{Q}) \cdot \text{curl}_M \tilde{P} - \frac{hm}{r} (\tilde{u}_n \cdot \tilde{P}) - h\tilde{u}_t \cdot \text{curl}_M (g\tilde{u}_\phi) + (\tilde{u}_n \cdot \tilde{Q}) \left(\text{div}_M \tilde{P} - \frac{mg}{r} \right) \right\} r dc. \end{aligned} \quad (53)$$

A Printed Circuit Balun for Use with Spiral Antennas*

R. BAWER† AND J. J. WOLFE†

Summary—A novel printed circuit balun is described which is particularly well suited to applications where space is at a premium. The design utilizes unshielded strip transmission line, but is readily adaptable to all of the common printed circuit transmission line techniques. When the balun is housed within the cavity of a spiral antenna, boresight error is virtually eliminated, ellipticity ratios of less than 2 db are maintained over an azimuth angle greater than $\pm 60^\circ$, and the input standing-wave ratio is less than 2:1 over an octave frequency range. Experimental results are given and additional applications are described.

* Manuscript received by the PGMTT, October 16, 1959; revised manuscript received, November 23, 1959. The work reported in this paper was sponsored by the Airborne Instruments Lab., Div. of Cutler-Hammer, Inc., Melville, N. Y., P.O. No. 6468, under Air Force Contract No. AF33(600)-37929.

† Aero Geo Astro Corp., Alexandria, Va.

I. INTRODUCTION

A BALUN is a term used by antenna engineers to describe a device which transforms an unbalanced to a balanced transmission line. To the microwave engineer, the same device might be called a ratrace, magic tee, or more generally a hybrid. In lumped circuit applications, we also find a similar device used in conjunction with balanced mixers, phase detectors, and single-sideband modulators, to name a few. However, regardless of what the device is called, the operation will appear to be basically similar provided the analysis is made using a compatible frame of reference. One particularly powerful tool used at microwaves

involves the circuit symmetry; however, for the particular baluns to be described, this approach is somewhat mathematical in nature and tends to obscure the physical significance of the various parameters. On the other hand, the equivalent circuit representation clearly places in evidence the role of each element of the unit and provides the designer with a compact analytic expression for the input impedance.

There are numerous devices¹⁻⁵ which are suitable for transforming a balanced to an unbalanced transmission line over a wide frequency range. The balun to be described here is nothing more than a novel realization of a conventional type of balun which is particularly suited for use with spiral antennas or similar applications where space is at a premium.

Fig. 1 shows the schematic drawing and equivalent circuit of a coaxial balun proposed by Roberts.¹ Z_a and Z_b represent the characteristic impedance of the transmission lines a and b , respectively. Z_{ab} is the characteristic impedance of the balanced transmission line composed of the outer conductors of lines a and b .

From the equivalent circuit, the impedance looking into the terminals $D-G$ can be directly written as

$$Z = -jZ_b \cot \theta_b + \frac{jRZ_{ab} \tan \theta_{ab}}{R + jZ_{ab} \tan \theta_{ab}} \quad (1)$$

On letting $\theta_b = \theta_{ab} = \theta$ and rationalizing, the following expression is obtained

$$Z = \frac{RZ_{ab}^2 + j \cot \theta [R^2(Z_{ab} - Z_b \cot^2 \theta) - Z_b Z_{ab}^2]}{Z_{ab}^2 + R^2 \cot^2 \theta} \quad (2)$$

Two interesting cases have been treated in the literature. Roberts¹ imposes the conditions that $Z_b = Z_a$ and $Z_{ab} = R$. For this case,

$$Z = R \sin^2 \theta + j(\cot \theta)(R \sin^2 \theta - Z_a) \quad (3)$$

and the input impedance becomes perfectly matched at two widely-separated frequencies given by the solution of

$$\sin^2 \theta = Z_a/R. \quad (4)$$

These frequencies are symmetrically disposed about a center frequency corresponding to $\theta = 90^\circ$.

Using essentially the same prototype balun, McLaughlin, *et al.*,² obtained a considerably greater bandwidth by minimizing the imaginary term in (2). Again, θ is chosen to be 90° at midband, Z_b is chosen according to

$$Z_b = R^2/Z_{ab}, \quad (5)$$

and Z_{ab} is made as large as possible.

In order to compare the two approaches, the standing-wave ratio curves shown in Fig. 2 were calculated for the case of a balun transforming a 50-ohm unbalanced load to a 70-ohm balanced load. The improvement of the more flexible form (*i.e.*, $Z_b = R^2/Z_{ab}$) is obvious. The advantage is somewhat offset by the increased complexity of the coaxial realization; however, this objec-

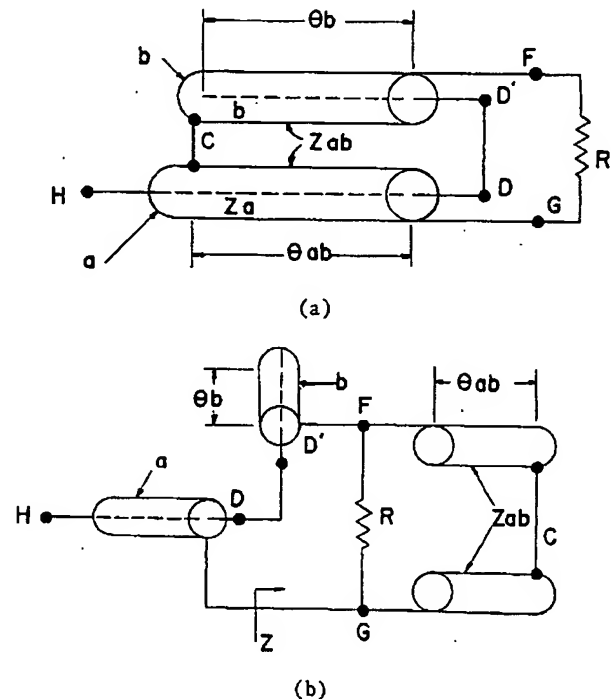


Fig. 1—Wide-band balun, from Roberts.¹ (a) Schematic drawing. (b) Equivalent circuit.

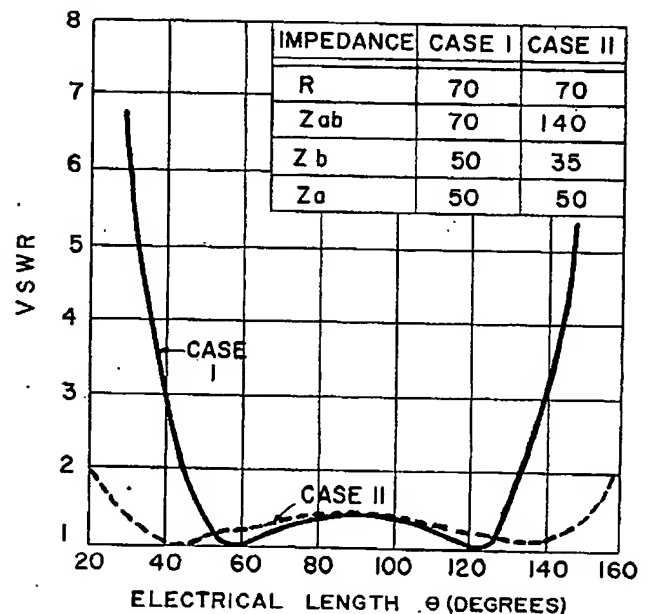


Fig. 2—Theoretical VSWR vs electrical length for two different balun design criteria.

¹ W. K. Roberts, "A new wide-band balun," *Proc. IRE*, vol. 45, pp. 1628-1631; December, 1957.

² J. W. McLaughlin, D. A. Dunn, and R. W. Grow, "A wide-band balun," *IRE TRANS. ON MICROWAVE THEORY AND TECHNIQUES*, vol. MTT-6, pp. 314-316; July, 1958.

³ Radio Res. Lab. Staff, "Very High Frequency Techniques," McGraw-Hill Book Co., Inc., New York, N. Y., pp. 85-91; 1957.

⁴ E. G. Fubini and P. J. Sutro, "A wide-band transformer from an unbalanced to a balanced line," *Proc. IRE*, vol. 35, pp. 1153-1155; October, 1947.

⁵ E. M. T. Jones and J. K. Shimizu, "A wide-band strip-line balun," *IRE TRANS. ON MICROWAVE THEORY AND TECHNIQUES*, vol. MTT-7, pp. 128-134; January, 1959.

tion is no longer valid for the printed circuit balun.

It is important to note that, in both of the cases illustrated, the balun provides no impedance transformation at the center frequency. This fact is particularly significant in all applications in which the load impedance is considerably different than 50 ohms. A low standing-wave ratio can then be obtained only by the use of an independent impedance transformer.

The need for an impedance transformer in a small diameter coaxial line again suggests the use of printed circuit techniques; in this case, to alleviate the severe mechanical problems and high cost which might otherwise be incurred. Still another incentive stems from an assumption inherent in the equivalent circuit representation of the balun. In this analysis, it was tacitly assumed that the line length $D-D'$ is small compared to the operating wavelength. The simultaneous requirements that Z_{ab} be large and the length $D-D'$ be small, are obviously in conflict; moreover, this length becomes prohibitively long at frequencies greater than approximately 2000 mc.

To circumvent this difficulty, one can introduce right-angle bends in the coaxial lines a and b , and thereby reduce length $D-D'$ to an arbitrarily small value. It is this coaxial structure that served as the prototype for the printed circuit balun.

II. PRINTED CIRCUIT BALUN

Fig. 3 illustrates the construction of the printed circuit balun. Note that the coaxial line of Fig. 1 has been replaced by unshielded strip transmission line and that the corresponding balanced transmission line now consists of the two ground planes.

For a given load and generator impedance, (2), (4), or (5) can be used to calculate the necessary parameter values. If, however, the mismatch corresponding to the ratio of load-to-generator impedance is greater than can be tolerated, an independent transforming section must be used. This can easily be accomplished by tapering the input transmission line.

The remaining steps of the design involve translating the calculated impedances and line lengths into actual physical dimensions of the printed line. At this point, it is important to consider any and all constraints which must be imposed on the balun. These constraints may be clearly defined, or may be contained within a broader specification, as in the case of the antenna assembly described in the next section.

With reference to Fig. 3, it is seen that two types of transmission line are involved. The first is the conventional unshielded strip transmission line consisting of a thin conductor over a ground plane; namely, lines a and b . The second type consists of a balanced transmission line made up of two flat, thin conductors of characteristic impedance Z_{ab} and length θ_{ab} . The simpler case will be discussed first.

The characteristic impedance and phase velocity of unshielded strip transmission line has been the subject

of numerous articles.^{6,7} The important point to remember is that virtually all of the field is confined within a region of about three conductor widths. Consequently, if the ground plane width is taken equal to or greater than three times the conductor width ($B > 3b$), the resulting transmission line is, for all practical purposes, nonradiating. As this criterion is violated (say $b < B < 3b$), the configuration takes on the appearance of a balanced transmission line and care must be exercised to minimize radiation caused by the unbalanced-to-balanced junction.

For reference purposes, approximate dimensions of unshielded strip transmission line for typical characteristic impedances are given in Table I. The reader is directed to the references for more complete data.

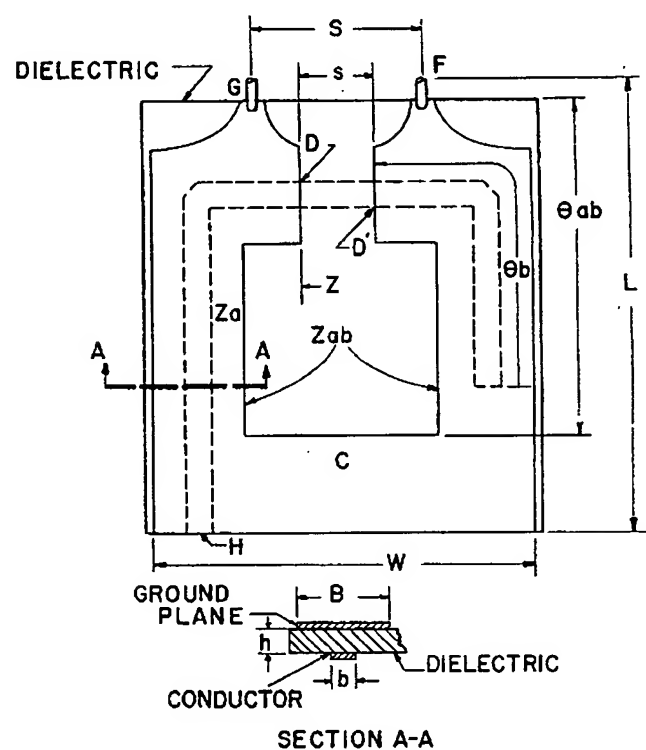


Fig. 3—Illustration of the construction of a printed circuit balun.

TABLE I
CHARACTERISTIC IMPEDANCE OF UNSHIELDED STRIP
TRANSMISSION LINE
($W > b$, $t = 0$)

b/h	Material G-10 Z_0 (ohms)	Material GB-112 Z_0 (ohms)
0.75	90	125
1.0	80	112
1.5	65	89
2.0	53	74
2.5	46	64
3.0	41	55
4.0	33	46

⁶ M. Arditi, "Characteristics of microstrip for microwave wiring," IRE TRANS. ON MICROWAVE THEORY AND TECHNIQUES, vol. MTT-3, pp. 31-56; March, 1955.

⁷ F. Assadourian and E. Rimai, "Simplified theory of microstrip transmission systems," PROC. IRE, vol. 40, pp. 1651-1657; December, 1952.

The physical length of the open-circuited transmission line (θ_b) depends upon the phase velocity in the printed circuit line. For the case of a homogeneous dielectric surrounding the lines, this phase velocity is given by

$$v = c/\sqrt{\epsilon} \quad (6)$$

where c is the velocity of light in free space and ϵ is the relative dielectric constant of the medium. Since the region between the conductor and the ground plane is filled with a dielectric while the remaining cross section is air, the problem becomes quite complex and one generally resorts to empirical techniques to establish the phase velocity. The velocity decreases as the width of the conductor increases and asymptotically approaches the velocity which would be obtained if the line were completely immersed in the dielectric.

In practice, the range of the ratio of conductor width to spacing above the ground plane is $1 < (b/h) < 5$. Over this range the phase velocity varies by about 10 per cent, which is well within the accuracy required for the balun design. Therefore, one may elect to use an average phase velocity (or average effective dielectric constant) instead of making the series of measurements necessary to describe the actual behavior. To this end, an approximate average effective dielectric constant can be taken as

$$\epsilon_s = 0.75\epsilon, \quad (7)$$

where ϵ is the dielectric constant of the base material. Eq. (6) can then be used for the initial calculation of θ_b , and the final length may easily be obtained by judicious trimming of the line length.

The impedance Z_{ab} and its corresponding phase velocity θ_{ab} present a more difficult problem. Short of actually attempting a solution to the problem using conformal mapping techniques, there appears to be no simple way to calculate or estimate the impedance of this configuration using available data. To further compound the problem, it may be recalled that the derivation of (1) was based on the assumption of a uniform balanced transmission line. The correct expression for the impedance Z of Fig. 3 must take into account not only the change in conductor spacing, but also the shape, length, and spacing of the terminals $G-F$. This is clearly no small undertaking.

In short, an analytic or approximate expression for the value of Z_{ab} is very desirable. Fortunately, the absence of this information has not proved detrimental, as attested to by the experimental results discussed in the next section. The redeeming feature can be attributed to the design requirement that Z_{ab} be as large as possible.


Nevertheless, some idea of the order of magnitude of Z_{ab} would be useful. To this end, measurements were taken over the range of strip widths and spacings which might be encountered in practice. The data were taken with a Boonton type 190 Q meter, using conventional lumped element measurement techniques to obtain the

inductance and capacitance of each configuration. The characteristic impedance was then calculated from the relation

$$Z_{ab} = \sqrt{L/C} \text{ ohms.} \quad (8)$$

The phase velocity does not significantly depart from the free space value, a fact which is to be expected in light of the line configuration. The results are given in Table II and should be sufficiently accurate for most balun designs.

TABLE II
CHARACTERISTIC IMPEDANCE OF PRINTED BALANCED
TRANSMISSION LINE

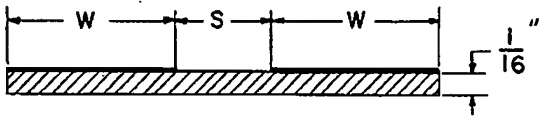

W/S	Z_0 (ohms)
2	220
4	185
6	170
8	160
10	155

III. APPLICATION TO SPIRAL ANTENNAS

The balun described here was developed to meet the need for a wide-band, compact device to feed a dual-arm spiral antenna from an unbalanced coaxial transmission line. It should be noted in passing that the printed circuit realization is not limited to this particular application, but is readily adaptable to a wide variety of uses. The printed circuit balun for spiral antennas represents one of the most stringent applications of this technique and, as such, clearly illustrates its extreme versatility.

At the onset of the development program, it was decided that the balun should be housed within the antenna structure. This necessarily imposed certain constraints on the physical size of the balun. In order to obtain a better insight into these constraints, a brief review of the operation of spiral antennas is given. The discussion is limited to those aspects which affect the balun design, and vice versa.

The spiral antenna⁸ is one of a class of so-called "frequency independent" antennas which are completely described by angles except for diameter. Physically, the antenna is a two-dimensional structure which is fabricated by photo-etching the geometric configuration on copper-clad laminate. Of the wide variety of shapes possible, only three have received wide attention: the

⁸ The spiral antenna was developed by W. E. Turner at Wright Air Dev. Center, Dayton, Ohio, in 1954. Since that time, most of the spiral antenna discussions have appeared as classified documents. A good unclassified reference is J. A. Kaiser, "Spiral antennas applied to scanning arrays," *Electronic Scanning Symp.*, Air Force Cambridge Res. Center, Bedford, Mass.; April, 1958. See also R. Bawer and J. J. Wolfe, "The Spiral Antenna," presented at 1960 IRE International Convention, New York, N. Y.; March 21-24, 1960. To be published in the 1960 IRE INTERNATIONAL CONVENTION RECORD.

1960

323

logarithmic or equiangular spiral, the Archimedean spiral, and the rectangular counterpart of the Archimedean spiral. The printed antenna may be of the single or two-conductor configuration, the latter being preferable at frequencies below about 5000 mc. Functionally, the antenna radiates a bidirectional circularly polarized beam normal to the plane of the printed element when fed from a balanced two-wire transmission line. In most applications, the spiral antenna is flush-mounted (*e.g.*, in the skin of an aircraft), so that the bidirectional characteristics are undesirable; unidirectional patterns may be obtained by mounting the spiral at the mouth of a cylindrical cavity as shown in Fig. 4.

The gain of the cavity-backed spiral antenna follows the behavior one would expect from a dipole over a ground plane, being a maximum when the cavity depth is about $\frac{1}{4}\lambda$ and dropping off quite rapidly for depths less than the $\frac{1}{8}\lambda$ and greater than $\frac{3}{8}\lambda$. Since it is desirable to house the balun within the cavity, the length of the structure must be less than one-eighth of the free-space wavelength for maximum bandwidth. This requirement is based on the assumption that the balun will be mounted at right angles to the plane of the printed spiral as shown in the figure.

The allowable width of the balun is related to the radiating mechanism of the antenna. Although there is no rigorous theory to explain the radiation from spirals, the "Band Theory" quite adequately describes the phenomenon and is generally accepted by workers in the field. According to this theory, radiation from a tightly-wound spiral will occur from a band with mean diameter equal to λ/π . Therefore, the width of the balun structure in the vicinity of the spiral terminals should be considerably less than this diameter. If this criterion is violated, obscuration of the spiral occurs and the axial ratio of the antenna is severely affected. In fact, axial ratio measurements at the higher frequencies afford an excellent means for checking this criterion. Experimental data have indicated that satisfactory operation will result if the width of the balun in the vicinity of the antenna terminals is less than about $\lambda/8$.

In review, there are constraints which are imposed on the balun size by virtue of its use with a spiral antenna and the manner in which the balun is mounted in the antenna cavity. For the configuration shown in Fig. 4, the criteria $L \leq \frac{1}{8}(\lambda)$ maximum and $W \leq \frac{1}{8}(\lambda)$ minimum prove to be a useful rule of thumb. The dimension S , the spacing between the output terminals of Fig. 3, is made as small as practical and compatible with the input terminal spacing of the spiral antenna.

Finally, it seems reasonable to evaluate any balun in terms of its behavior under actual operating conditions; namely, when driven from a prescribed generator and terminated in prescribed load. Thus, the final evaluation of the printed balun feed for the spiral antenna should be based on the characteristics of the entire antenna structure. Typical specification for spiral antennas of the type considered are:

Frequency range—1 octave,
Axial ratio—3 db maximum,
VSWR—2:1 maximum,
Beam squint— $<5^\circ$.

In the following section, some experimental results are discussed. The data are limited to the antenna configuration shown in Fig. 4 in which the balun is contained within the cavity and mounted at right angles to the plane of the spiral. Several alternate balun configurations and additional applications of the printed circuit balun are given in Section V.

IV. EXPERIMENTAL RESULTS

A series of printed circuit baluns were developed to operate with cavity-backed spiral antennas over the frequency range of 104 mc through 4200 mc. The initial design effort was concentrated on the S-band unit, since this case represented the most severe situation from the point of size and, consequently, the most severe test of the validity of the approximations.

Fig. 5 illustrates the final form of the balun feed which was designed to operate with a 3-inch diameter, dual-arm, Archimedean spiral antenna. The balun was photoetched on 1/32 inch thick, 2-ounce copper-clad epoxy fiberglass (G-10) and is approximately 1 inch long by $\frac{3}{4}$ inch wide.

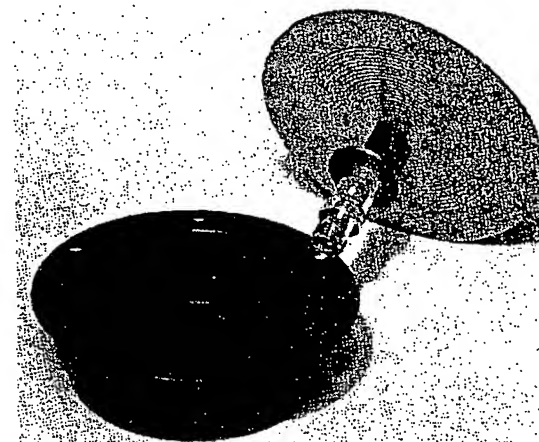


Fig. 4—An exploded view of a spiral antenna assembly.

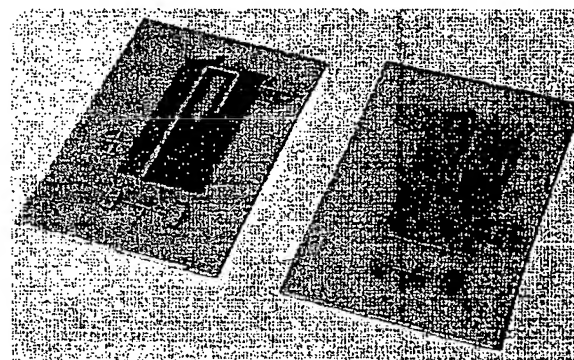


Fig. 5—Photograph of the final balun feed for an S-band spiral antenna.

Attention is specifically called to the following points:

- 1) The impedance of the spiral antenna was estimated to be in excess of 100 ohms; consequently, the input conductor was tapered to provide a characteristic impedance of about 50 ohms at the balun input and an impedance of about 100 ohms at the center line of the balun. The line continues at this impedance to the open circuit.
- 2) At the upper end of the frequency band, obscuration of the spiral by the balun resulted in an increased axial ratio. This effect was virtually eliminated by the simple expedient of trimming the corners of the ground plane as shown in Fig. 4.
- 3) The final results were obtained by systematically varying a number of the parameters. The major change involved the length of the open-circuited line θ_0 , which was adjusted to give a VSWR curve that is roughly symmetrical about the center frequency. The characteristic impedance and length of the balanced line Z_{ab} and θ_{ab} were found to have only a second-order effect.

Data showing the frequency dependence of the input impedance and axial ratio of a printed circuit balun and an S-band spiral antenna are shown in Fig. 6. If we neglect antenna gain, the major factor which limits the band-width of the antenna assembly is the axial ratio. The deterioration of axial ratio can be attributed to the spiral diameter at the low end of the frequency band (not illustrated) and balun size at the high end of the band. The input impedance is, of course, adversely affected at these limits also, but to a lesser extent than the axial ratio.

Fig. 7 illustrates the type of radiation patterns which have been obtained. The data were taken for two orthogonal cuts on an automatic pattern recorder with the

antenna immersed in microwave absorbing material to simulate free space operating conditions. Axial ratio data (Fig. 6) were obtained by recording the maximum variation in the power received from a test antenna located on axis ($\phi = \theta = 0$ degrees) as the spiral antenna was rotated 360° ; this corresponds to the maximum difference (in db) between E_θ and E_ϕ at the origin of Fig. 7 for all orientations of the spiral.

There are two important points which should be emphasized. The first relates to range of azimuth angles over which the ellipticity ratio (E_θ/E_ϕ) remains comparable to the on-axis ratio. For the particular cases illustrated, the ellipticity ratio remains less than 1 db over an azimuth angle of greater than $\pm 60^\circ$.

The second point relates to the symmetry of the patterns about the axis of the antenna; beam squint is negligible. This behavior should be compared to that obtained with more conventional feeds in which beam squint in the order of 10° to 15° is common.

The results of the S-band balun are typical of the data which have been taken on units designed to operate as low as 140 mc. The chief difference between these baluns and the S-band unit is the thickness of the copper-clad material; for mechanical reasons, the lower-frequency baluns were photo-etched on 1/16-inch material.

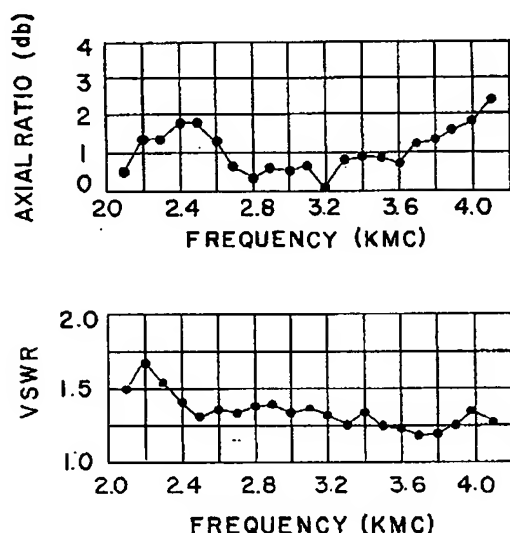


Fig. 6—Input impedance and axial ratio of a printed circuit balun and spiral antenna.

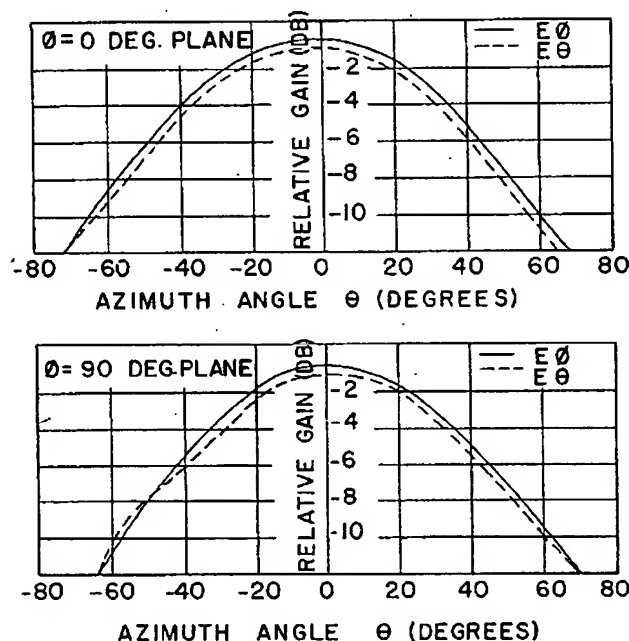


Fig. 7—Typical radiation patterns of an S-band spiral antenna fed from a printed circuit balun.

1960

de Ronde, et al.: The P-I-N Modulator, an Electrically Controlled Attenuator

325

V. CONCLUSIONS

In the preceding discussion, a rather specialized application of a printed circuit balun was presented. The use of the balun with a cavity-backed spiral antenna, particularly when the balun is housed within the cavity, places severe limitations on the element size; it is expected that improved performance might be realized if these constraints were relaxed.

Nevertheless, this form factor does have some definite advantages which might not be immediately apparent. For example, by simply joining a second printed line at right angles to the balun (*i.e.*, normal to the printed line), the entire back plate of the cavity is made available for additional circuitry. In this manner, directional couplers, filters, etc., can easily be incorporated directly within the antenna structure with no space and negligible weight penalty.

An alternate configuration which appears to have some merit would involve mounting the balun parallel to the spiral and close to the cavity back plate. For this case, the size constraints can be significantly relaxed and the impedance transformer could now be placed in a printed balanced line connecting the balun output to the spiral input terminals. In other applications, it may be desirable to utilize a shielded configuration. The design described is equally applicable to all of the shielded strip transmission lines in common use.

In conclusion, it should be emphasized that the printed circuit balun is inherently capable of performance comparable to that of other wide-band baluns. With regard to basic design, nothing new is claimed. With regard to physical realization, it is believed that this printed circuit technique offers much in the way of ease of fabrication and miniaturization and, above all, a flexibility found in no other transmission line.

The P-I-N Modulator, an Electrically Controlled Attenuator for MM and Sub-MM Waves*

F. C. DE RONDE†, H. J. G. MEYER†, AND O. W. MEMELINK†

Summary—The construction and performance of a millimeter wave modulator are described. The main part of the modulator consists of a *p-i-n* germanium structure inserted into a rectangular waveguide. A modulation depth of 11 db could be obtained at frequencies up to 5 kc, this modulation being caused for the greatest part by attenuation.

I. INTRODUCTION

MICROWAVE modulators are used for various purposes, *e.g.* the formation of sidebands and particularly the increase of the sensitivity of measurements. In view of the great importance of having a modulator available, it is not surprising that various types of modulators are already in use to date.

The one most commonly employed is an absorption type modulator which makes use of a ferrite. Here the losses of the ferrite or the plane of its polarizing action are varied by a magnetic field. The necessity of using a magnetic field limits the modulating frequency to rather

low values and the coils required make the device somewhat bulky.

Another type of modulator, also employing a magnetic field, was proposed by Gunn and Hogarth.¹ Here the number of free charge carriers in a semiconductor is varied by driving them either to a surface with a high or to a surface with a low value of the surface recombination velocity.

A modulator in which no use is made of a magnetic field is the so-called transparitor of Arthur, Gibson, and Granville.² Here the differential mobility of charge carriers in a semiconductor, and therefore its attenuation, is varied by the application of a strong electric field. An advantage of this arrangement is the possibility of employing very high modulation frequencies, the theoretical response time of the device being of the order of 10^{-12} seconds. A definite disadvantage for use under continuous wave conditions, however, is its great

* Manuscript received by the PGMTT, November 30, 1959; revised manuscript received, January 18, 1960.

† Philips Res. Labs., N. V. Philips' Gloeilampenfabrieken, Eindhoven, Netherlands.

¹ J. B. Gunn and C. A. Hogarth, "A novel microwave attenuator using germanium," *J. Appl. Phys.*, vol. 26, p. 353; March, 1955.

² J. B. Arthur, A. F. Gibson and J. W. Granville, "The effect of high electric fields on the absorption of germanium at microwave frequencies," *J. Electronics*, vol. 2, p. 145; September, 1956.

Chairman of the U. S. Committee for Study Group XIV
—A. G. Jensen, Bell Telephone Laboratories, Murray Hill, N. J.

More complete information on the technical subjects under study by the CCIR, *i.e.*, its program of work for the next three years, may be found in Volume I of the results of the Warsaw Assembly which contains the texts of all recommendations, reports, questions, study programs, and resolutions adopted or reaffirmed at Warsaw. This volume may be obtained from the General Secretariat of the International Telecommunication Union at Geneva, Switzerland. Payment for the publication should accompany this order and should be made in Swiss francs. The price of the volume is 37.25 Swiss francs.

Information in more detail on the United States activities for the Warsaw Assembly on technical questions under study is available in the report of the U. S. Delegation to the Assembly and may be obtained, free of charge, by writing to Mr. Francis Colt de Wolf, Chief, Telecommunications Division, Department of State, Washington 25, D. C.

The coordination of the preparatory work in the United States for the Ninth Plenary Assembly, both on the technical studies under consideration and on organizational planning for the Assembly in the United

States, is centralized in the Telecommunications Division of the Department of State. Mr. de Wolf is Chairman of the over-all U. S. Preparatory Committee and the U. S. Executive Committee for the CCIR. The members of the Executive Committee and of the U. S. Committees for the various Study Groups are, for the most part, representatives of government agencies and private telecommunication companies or organizations having an interest in the work. The Department of State welcomes the participation of any person wishing to contribute to the studies. If further information on the United States committee structure is required, it will be furnished in response to written requests to Mr. de Wolf. On the other hand, any company or person not already participating in the work of the various Study Group Committees and wishing to do so, should get in touch with either Mr. de Wolf or with the United States chairman of the appropriate Study Group Committee whose name and address is shown herein.

As a further item of interest, the Institute of Radio Engineers is represented in the CCIR preparatory committee work by A. G. Jensen, by Professor Ernest Weber of the Brooklyn Polytechnic Institute, and by L. G. Cumming, Technical Secretary of the IRE, who will be able to provide further detailed information about the participation of the IRE in the technical studies.

A New Wide-Band Balun*

WILLMAR K. ROBERTS†, MEMBER, IRE

Summary—This paper describes a form of balun which is useful for matching a balanced circuit to an unbalanced circuit of nearly the same impedance over a wide frequency range. The bandwidth increase is obtained by the use of a quarter-wave transmission line section which is placed inside one of the balanced arms, thereby minimizing the over-all physical length. It is shown that a practical balun of this type, designed to match a 50-ohm unbalanced line to a balanced 70-ohm antenna, has a voltage standing-wave ratio of 1.4 or better over a frequency band of about 2.8 to 1. The wide bandwidth, simplicity, and reasonable physical dimensions make the balun particularly useful in connection with the adjustable-length dipole antennas which are generally used for vhf and uhf field-strength measurement.

INTRODUCTION

A BALUN is a device intended to act as a transformer, matching an unbalanced circuit to a balanced one, or vice versa. The balun de-

scribed here was developed to meet a need for a low-loss impedance-matching device to connect a balanced dipole antenna to an unbalanced coaxial transmission line. It was desirable that the balun have a wide-band characteristic so as to make unnecessary any adjustments on the balun over a range of frequencies covered by adjusting the telescoping elements of the dipole antenna. Certain previously described wide-band transformers,^{1,2} require a considerable amount of space because of the use of the frequency-compensating effects of one or two quarter-wave transmission line sections connected between the balun and the balanced load. The balun described here employs a single quarter-

¹ Radio Res. Lab. Harvard Univ., "Very High-Frequency Techniques," vol. 1, 1st ed., McGraw-Hill Book Co., Inc., New York, N. Y., pp. 85-91; 1947.

² E. G. Fubini and P. J. Sutro, "A wide-band transformer from an unbalanced to a balanced line," *Proc. IRE*, vol. 35, pp. 1153-1155; October, 1947.

* Original manuscript received by the IRE, June 17, 1957; revised manuscript received September 17, 1957.

† Federal Communications Commission, Laurel, Md.

wave length of transmission line for compensation over a wide band, but the construction is arranged to allow this line to be housed inside one of the arms of the balun. Thus, the over-all physical length is only one-quarter wavelength.

DESCRIPTION OF THE BALUN

A diagram of the balun is shown in two forms in Figs. 1 and 2. The sketches represent two variations of the same arrangement. The device is composed of two lengths of coaxial transmission line, a and b , suitably connected. The symbols Z_a and Z_b represent the characteristic impedances of lines a and b , respectively, considering the waves propagated within each line. Z_{ab} is the characteristic impedance of the balanced transmission line ab composed of the *outer* conductors of transmission lines a and b .

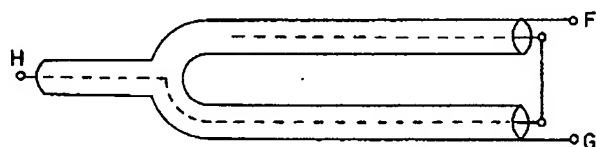


Fig. 1—The new balun. The balanced terminals are at F and G , and the unbalanced connection is made at H .

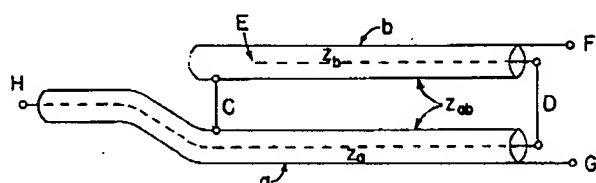


Fig. 2—A slight variation of the balun for the purpose of description.

The coaxial terminal H is the connection for the external unbalanced source (or load), while the terminals F and G are the points of attachment of the balanced load (or source). Center conductors of lines a and b are connected at D , while outer conductors of a and b are connected at C . The center conductor of line b ends at E .

IMPEDANCE ANALYSIS

Fig. 3 shows an equivalent circuit of the balun for the purpose of studying the impedance. The terminals F , G , and H are the same as in Figs. 1 and 2. S and R are external impedances which may be connected to the balun. M is the impedance looking into coaxial line b toward the open circuit at E . N is the impedance looking from FG along the open transmission line ab toward the short-circuit at C .

If the transmission line losses are neglected,

$$\begin{aligned} M &= -jZ_b \cot \theta_b \\ N &= jZ_{ab} \tan \theta_{ab} \end{aligned} \quad (1)$$

where θ_b and θ_{ab} are, respectively, the electrical lengths of transmission lines b and ab , taking into account their respective physical lengths and velocities of propagation.

From the equivalent circuit,

$$Z = \frac{RN}{R+N} + M \quad (2)$$

$$Z = \frac{jRZ_{ab} \tan \theta_{ab}}{R + jZ_{ab} \tan \theta_{ab}} - jZ_b \cot \theta_b \quad (3)$$

$$Z = \frac{R}{\frac{R^2}{Z_{ab}^2 \tan^2 \theta_{ab}} + 1} + \frac{jR^2 Z_{ab} \tan \theta_{ab}}{R^2 + Z_{ab}^2 \tan^2 \theta_{ab}} - jZ_b \cot \theta_b \quad (4)$$

Let the electrical lengths of line segments b and ab be equal, making $\theta_b = \theta_{ab} = \theta$, and let characteristic impedance $Z_{ab} = R$ and $Z_b = Z_a = S$. Then

$$Z = R \sin^2 \theta + j(\cot \theta)(R \sin^2 \theta - S). \quad (5)$$

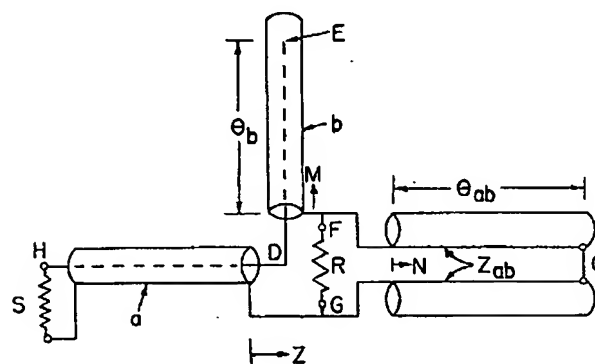


Fig. 3—An equivalent circuit of the balun for the purpose of studying its impedance characteristics. The lettering is the same as that of Fig. 2.

The reactive component of the impedance is zero when $\cot \theta = 0$, (for which Z equals R) and also when $\sin^2 \theta = S/R$ (for which Z becomes S). Fig. 4 is a sketch of the variation of resistance and reactance in the neighborhood of the lowest-frequency band of interest. The physical lengths being fixed, θ varies directly with frequency. The region $\theta_2 - \theta_1$ locates a frequency band $f_2 - f_1$ over which the balun has impedance matching characteristics of a desirable nature. $\cot \theta = 0$ establishes the center of the band and corresponds to an electrical length of 90° . From Fig. 4 it appears that the balun serves to transform from a resistance R to another resistance S with a perfect impedance match at frequencies f_1 and f_2 . There is an approximate match in the band of frequencies within this interval and also a frequencies somewhat outside. The midband standing wave ratio increases with the ratio of R/S , hence the balun is particularly interesting for balanced to unbalanced transformations where the desired impedance transformation ratio is low.

An example is a balun for matching a 70-ohm balanced source to a 50-ohm unbalanced load. In this case let $Z_a = Z_b = 50$ ohms, $Z_{ab} = 70$ ohms, and $\theta_{ab} = \theta_b$. The values of θ for which a perfect match is expected are given by

$$\sin^2 \theta = \frac{S}{R} = \frac{50}{70}$$

$$\theta = 58^\circ, 122^\circ.$$

Since θ is linearly proportional to frequency, the frequency band between points of perfect match has a ratio of 2.1. The mismatch at the worst point in this band (namely, at the center frequency) corresponds to a voltage standing wave ratio of 1.4.

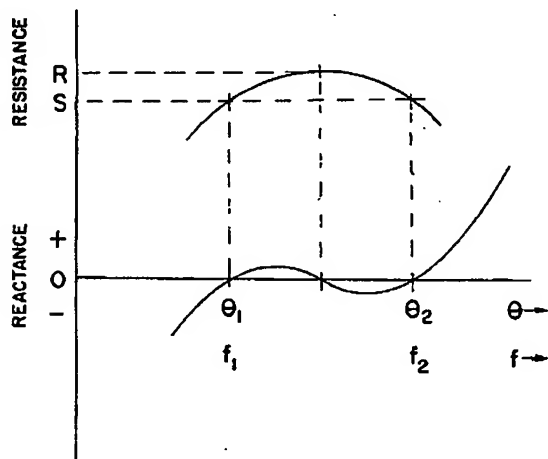


Fig. 4—The input resistance and reactance at the point Z of Fig. 3.

PHYSICAL DETAILS OF CONSTRUCTION

A number of baluns have been made in the form shown in Fig. 5. In practice, this balun is mounted inside a bakelite tube supporting a dipole antenna used in field strength measurements. The balun shown is made of two lengths of RG-58/U coaxial cable, whose shield braids form a 70-ohm parallel transmission line ab . The length of the parallel section, measured from the point C , where the two braids are connected together, to the points F and G , where the balanced circuit is to be connected, is made one-quarter wavelength at the center frequency of the operating range. For the determination of this length, it is necessary to take account of the propagation velocity, which is somewhat higher than that of the waves moving along the inside of the coaxial cables. The center conductor of the coaxial line b is cut by drilling a hole into the cable at the point E , which (considering the velocity of propagation inside the cable) corresponds to a quarter wavelength from the balanced terminals F and G at the center frequency of the band.

The construction of this version of the balun is based upon the realization of a characteristic impedance of

70 ohms in the parallel transmission line composed of the two lengths of cable held together by a wrapping of plastic tape. Because of variations in composition, diameter, or eccentricity of the outer insulation, the characteristics of parallel lines formed from certain coaxial cable samples may differ appreciably from the desired value. It is generally necessary, therefore, to determine the characteristic impedance and velocity of propagation by testing sample parallel line sections made of the intended material.

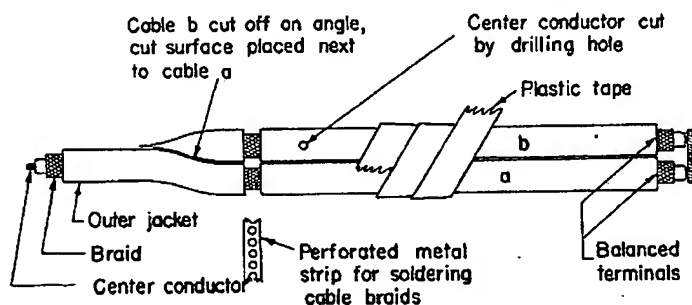


Fig. 5—The construction of a balun for matching a 50-ohm coaxial cable to a 70-ohm balanced load. The balun is made of two lengths of RG-58/U cable, held together by a wrapping of plastic tape. In use, this balun is housed inside an insulated tubing which supports the center of a half-wave dipole antenna. Alternatively, a metal housing could be employed to shield the balun.

PERFORMANCE OF THE BALUN

Fig. 6 shows the measured vswr looking into the unbalanced connector of a practical 70- to 50-ohm balun, made according to Fig. 5, when the balanced terminals were terminated by a 70-ohm noninductive resistor. This same figure gives the measured loss. The loss was measured through two identical baluns, their balanced terminals being joined through a 70-ohm balanced resistive attenuator for isolation. The loss of one balun is considered to be one-half the total attenuation, subtracting first the loss of the attenuator. The baluns have excellent symmetry, in that no appreciable change in measured values resulted from reversal of the balanced terminals of either balun. The curves in Fig. 6 are typical of those which have been measured on other baluns of the same construction covering frequencies as high as 1000 mc.

To verify the performance of the balun when associated with a dipole antenna, two identical balun-dipole assemblies were constructed to cover the range 400 to 1000 mc. Signals at a number of frequencies across this range were fed to one assembly, radiated, and picked up by the other. The attenuation through this path was compared with that obtained when the coaxial transmission lines were disconnected from the baluns and connected to each other. The propagation path between the antennas was approximately equivalent to free-space conditions. On the assumption that the resonant

1957

Roberts: A New Wide-Band Balun

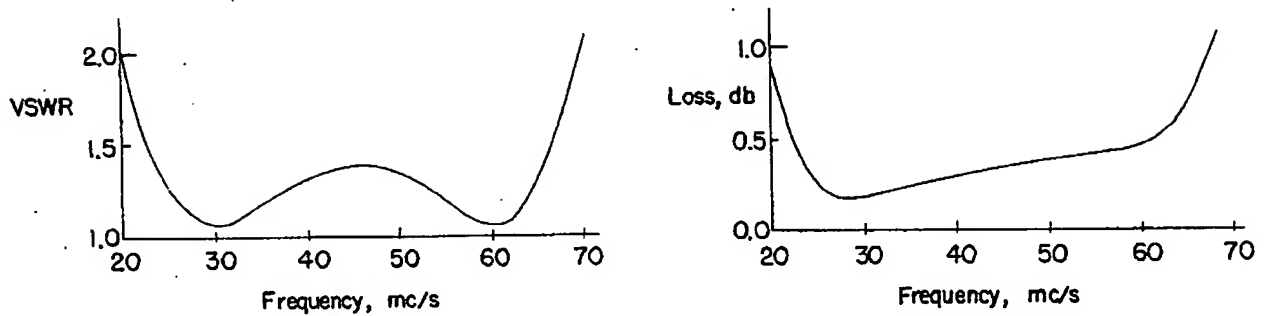


Fig. 6—The measured performance of the balun of Fig. 5 when the balanced terminals are connected to a 70-ohm noninductive resistance.

dipole antennas had a power gain over isotropic antennas of 1.64 (the theoretical value for an infinitely-thin dipole), and taking into account the distance between the dipoles, the loss attributable to the sum of dipole loss and balun loss for one assembly was found to be $0.6 \text{ db} \pm 0.4 \text{ db}$ at the frequencies of test. This is considered to be an acceptable verification of the loss of the balun.

CONCLUSION

A new form of balun has been described. It has low loss and excellent impedance characteristics over almost a 3 to 1 frequency band, without any adjustments. The dimensions of the balun make it suitable for use at vhf and uhf, particularly in association with the adjustable dipole antennas widely used for field strength measurements in these frequency ranges.

CORRECTION

Dr. Janis Galejs, of the Applied Research Laboratory, Sylvania Electric Products, Inc., Waltham, Mass., has called the following to the attention of the editor.

The comments of Strom¹ on the recent remarks by Goldstein² appear to be incorrect. In deriving (11) from (10) Strom states that the second integral on the right-hand side of (10) vanishes. Following Goldstein,³ the band-pass filter output of the radiometer $v(t)$ is a sum of a periodic and of a random voltage

$$v(t) = A \cos \omega_a t + Bm(t),$$

where $m(t)$ is a random voltage. Substituting $v(t)$ in (10) the term proportional to A^2 in the second integral

$$\lim_{T \rightarrow \infty} \frac{1}{T} \int_0^T v(t)v(t+\tau) \frac{\cos \omega_a(2t+\tau)}{2} dt$$

gives a contribution to the constant term of $R_3(\tau)$, that is, equal to the contribution of the term proportional to A^2 in the first integral

$$\lim_{T \rightarrow \infty} \frac{1}{T} \int_0^T v(t)v(t+\tau) \frac{\cos \omega_a \tau}{2} dt.$$

The sum of these two terms is equal to the constant term in the $R_3(\tau)$ expression of Goldstein,⁴ but is twice the constant term in (12) of Strom.

Strom considers his (8) to (12) as a special case of a more general treatment.⁵ With the special case in error, a similar error may be expected in the development leading to (5) and (7). In order to make (5) and (7) compatible with the revised (12) and with the results of Goldstein,³ a constant 16 should be substituted for the constant 32 in (5) and (7) of Strom.¹

¹ L. D. Strom, "The theoretical sensitivity of the Dicke radiometer," *Proc. IRE*, vol. 45, pp. 1291-1292; September, 1957.

² S. J. Goldstein, Jr., "A comparison of two radiometer circuits," *Proc. IRE*, vol. 45, pp. 365-366; March, 1957.

³ S. J. Goldstein, Jr., private communication.

⁴ S. J. Goldstein, Jr., "A comparison of two radiometer circuits," *Proc. IRE*, vol. 43, pp. 1663-1666; November, 1955.

⁵ L. D. Strom, "The theoretical sensitivity of the Dicke radiometer," dissertation, University of Texas; February, 1957.